



# WPLED10W



## DESCRIPTION

LED 10 Watt Wallpacks

## SPECIFICATIONS

### Ambient Temperature:

Suitable for use in 40C (104F) ambient temperatures

### California Title 24:

LPACK complies with California Title 24 building and electrical codes.

### Cold Weather Starting:

The minimum starting temperature is -40°C

### Color Accuracy:

92 CRI

### Color Stability:

RAB LED products significantly exceed Energy Star Requirements for Chromatic Stability during LM-80 Testing.

### Color Temperature (Nominal CCT):

5250 K (Daylight)

### Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

### Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

### Equivalency:

The WPLED10 is Equivalent in delivered lumens to a 70W Metal Halide Wallpack.

### Finish:

Chip and fade resistant polyester powder coat finish.

### Fixture Efficacy:

41 Lumens per Watt

### For use on LEED Buildings:

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

### Gaskets:

High Temperature Silicone

### Green Technology:

RAB LEDs are Mercury, Arsenic and UV

### LED Replacement Range:

The WPLED10 can be used to replace 35-100W Metal Halide Wallpacks based on delivered lumens.

### Heatsink:

Cast aluminum thermal management system for optimal heat sinking. The LPACK is designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature.

### Housing:

Precision die cast aluminum housing, lens frame.

### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### LED Light Engine:

Multi-chip 10W high output long life LED Driver: Constant Current, Class II, 120V-240V, 50/60 Hz, 350mA

### Lumen Maintenance:

The LED will deliver 70% of its initial lumens at 50,000 hours of operation.

### Mounting:

Junction box and surface mount.


### Patents:

The LPACK design is protected under patents pending in the U.S., Canada, China, Taiwan and Mexico.

### Color:

White

## DIMENSIONS

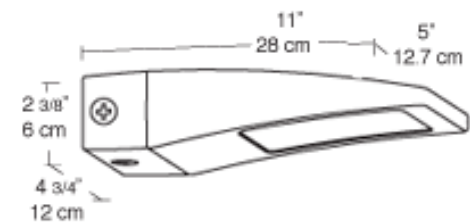

## ORDERING INFORMATION

LED	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
Lamp supplied with fixture	10	LED	Thermal	Constant Current	.43 A/.43 A	.43 A/.43 A	.43 A/.43 A	N/A	13.2	N/A	547	50000
<b>Factory Installed Options</b>												
Add suffix to Catalog Number			Photocontrol for 277V (P/PC)									

Note: Specifications may change without notice